MC-331 LPG/NH3 Transport Trailer

ALLIANCE
TRUCK AND TANK
LPG, NGL & NH3 STORAGE SOLUTIONS

MADE IN USA

11,600 SHOWN BELOW

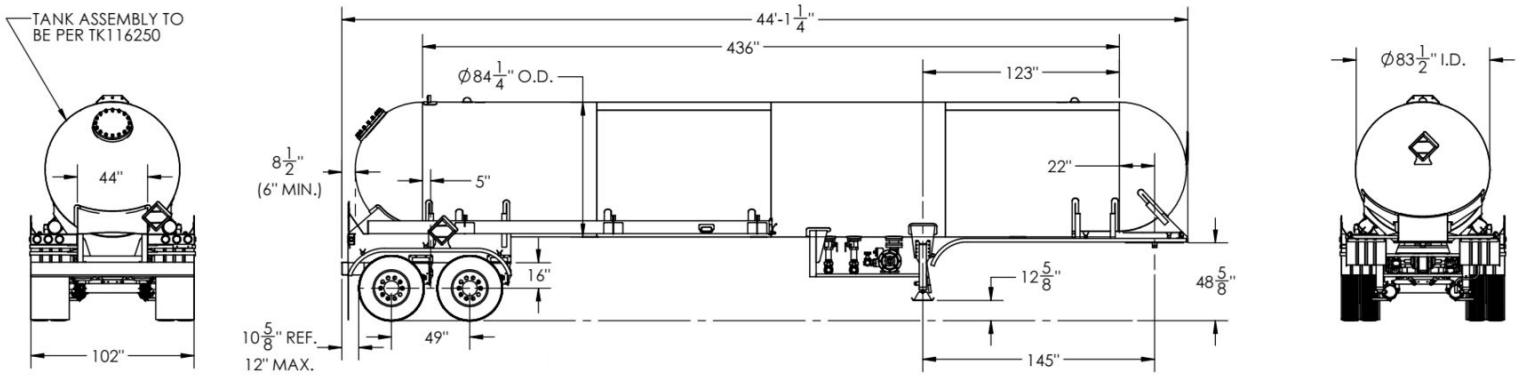

CAPACITY: 10,600 GALLONS

- MAWP: 265 or 250 PSIG @ -20° F/125° F
- SA-517 Grade E shell and head steel
- SA-517 Grade E flange/manway steel
- Carbon steel sub-frame
- Constructed in accordance with ASME Section VIII, Division 1, D.O.T. specification MC-331, and NFPA 58
- Suspension: Ridewell air ride suspension (customer may select any other option)
- 49" axle spacing
- Axles: (2) Ridewell
- 77.5" Track
- 23,000 lb rating
- Disc Brake (standard) Drum option available
- Haldex 4S/2M ABS brake system
- (8) 8.25 x 22.5 10-hole hub piloted wheels
- Marshall valves, ACME adapters, safety relief valves, ACME caps
- 4" Blackmer TLGLF-4 pump
- Gauges: Level gauges set at 83%, 85%, 87%, and 90, 4" dial float gauge, -40° F to 120° F thermometer, 1-400 PSI pressure gauge all installed on recess well on the curb-side

CAPACITY: 11,600 GALLONS

- MAWP: 250 PSIG @ -20° F/125° F
- SA-517 Grade E shell and head steel
- SA-517 Grade E flange/manway steel
- Carbon steel sub-frame
- Constructed in accordance with ASME Section VIII, Division 1, D.O.T. specification MC-331, and NFPA 58
- Suspension: Ridewell air ride suspension (customer may select any other option)
- 49" axle spacing
- Axles: (2) Ridewell
- 77.5" Track
- 23,000 lb rating
- Disc Brake (standard) Drum option available
- Haldex 4S/2M ABS brake system
- (8) 8.25 x 22.5 10-hole hub piloted wheels
- Marshall valves, ACME adapters, safety relief valves, ACME caps
- 4" Blackmer TLGLF-4 pump
- Gauges: Level gauges set at 83%, 85%, 87%, and 90, 4" dial float gauge, -40° F to 120° F thermometer, 1-400 PSI pressure gauge all installed on recess well on the curb-side