

ALLIANCE

TRUCK AND TANK
LPG, NGL & NH3 STORAGE SOLUTIONS

LPG & NGL Storage Vessels



All LPG and NGL Storage Vessels are built in a state-of-the-art U.S. manufacturing facility where propane, ammonia, carbon dioxide, refrigerants and other compressed gas storage vessels are produced. Ready for delivery anywhere across North America!

Standard Sizes:


- 12,000 gallon capacity
- 18,000 gallon capacity
(Saddle Mounted, Skid Mounted and Trailer Mounted Porta Pack options available)
- 30,000 gallon capacity
(Saddle Mounted and Skid Mounted options available)
- 60,000 gallon capacity
- 90,000 gallon capacity

SPECIFICATIONS:

- Conforms to current edition / latest revision of ASME, Section VIII, Div. 1, rules for construction of pressure vessels.
- Standard operating pressure and temperature: 250 PSI @ 125 °F.
- Vessel dimensions shown are nominal and subject to change.
- Saddles (as shown) are optional.
- All exterior surfaces are steel grit blasted, SP6 and coated with epoxy light color primer.

AllianceTruckandTank.com 800-632-2038

LPG & NGL Storage Vessels

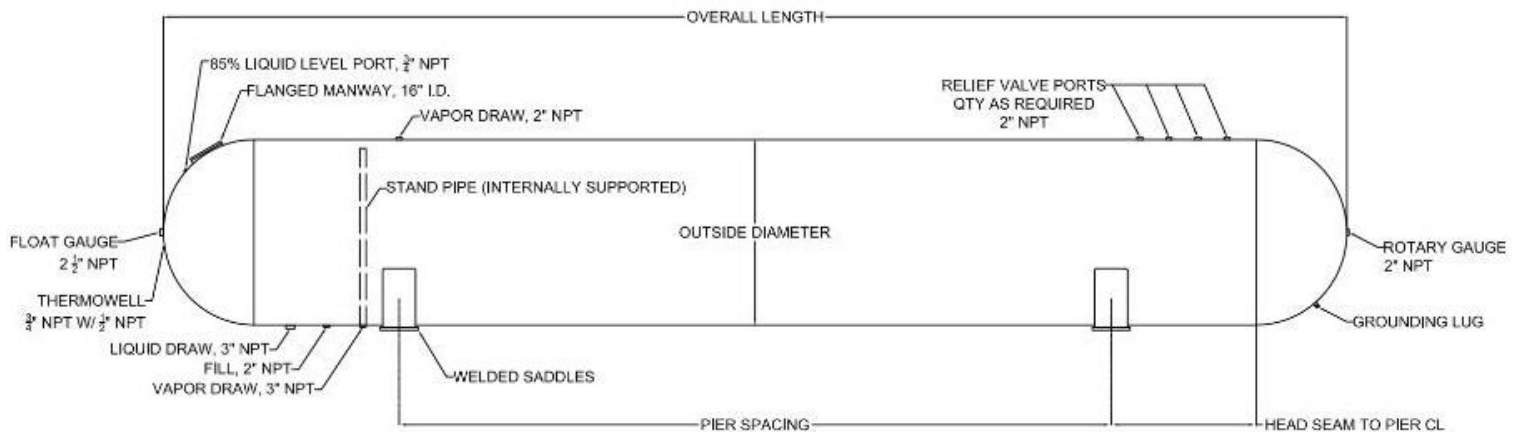

Standard openings are indicated. Additional openings as required. Ask for more details.

CAPACITY IN US WATER GALS	OUTSIDE DIAMETER	OVERALL LENGTH	ENGINEERED PIER SPACE	HEAD SEAM TO PIER CL
12,000	84"	44' - 10 1/2"	27'	5' - 5 1/4"
18,000	109 3/8"	40' - 9 3/8"	21'	5' - 4"
30,000	109 3/8"	65' - 11 1/2"	46'	5' - 6"
30,000	131 7/8"	46' - 9 7/8"	25'	5' - 5"
60,000	131 7/8"	90'	68'	5' - 6"
90,000	132 "	135'	90'-6"	16'

- Conforms to current edition / latest revision of ASME, Section VIII, Div. 1, rules for construction of pressure vessels.
- Standard operating pressure and temperature: 250 PSI @ 125 °F.
- Vessel dimensions shown are nominal and subject to change.
- Saddles and skid (as shown) are optional.
- All exterior surfaces are steel grit blasted, SP6 and coated with epoxy light color primer.

