



**Imperial[®]
Steel**

UNDERGROUND VESSEL



GENERAL SPECIFICATIONS

- Designed and built to ASME Section VIII, Division 1
- Complies with NFPA 58
- Registered with national board
- Rated at 250 PSI from -20° to 125°F
Vacuum purged - Ready to fill
- Rego valves
- Rochester liquid level gauges standard with steel gears and snap on dial Superior
- Powder coated finish
- Underground black plastic shroud and lid included with purchase



**Customer service
and Sales**

luis@imperialsteelgroup.com

19179 Blanco Rd. Ste 105-440
San Antonio, Texas 78258


USA: +1 (210) 401-0156

Standard WG offering: 500 & 1000
WG Standard colors: RED



**Imperial[®]
Steel**

UNDERGROUND VESSEL

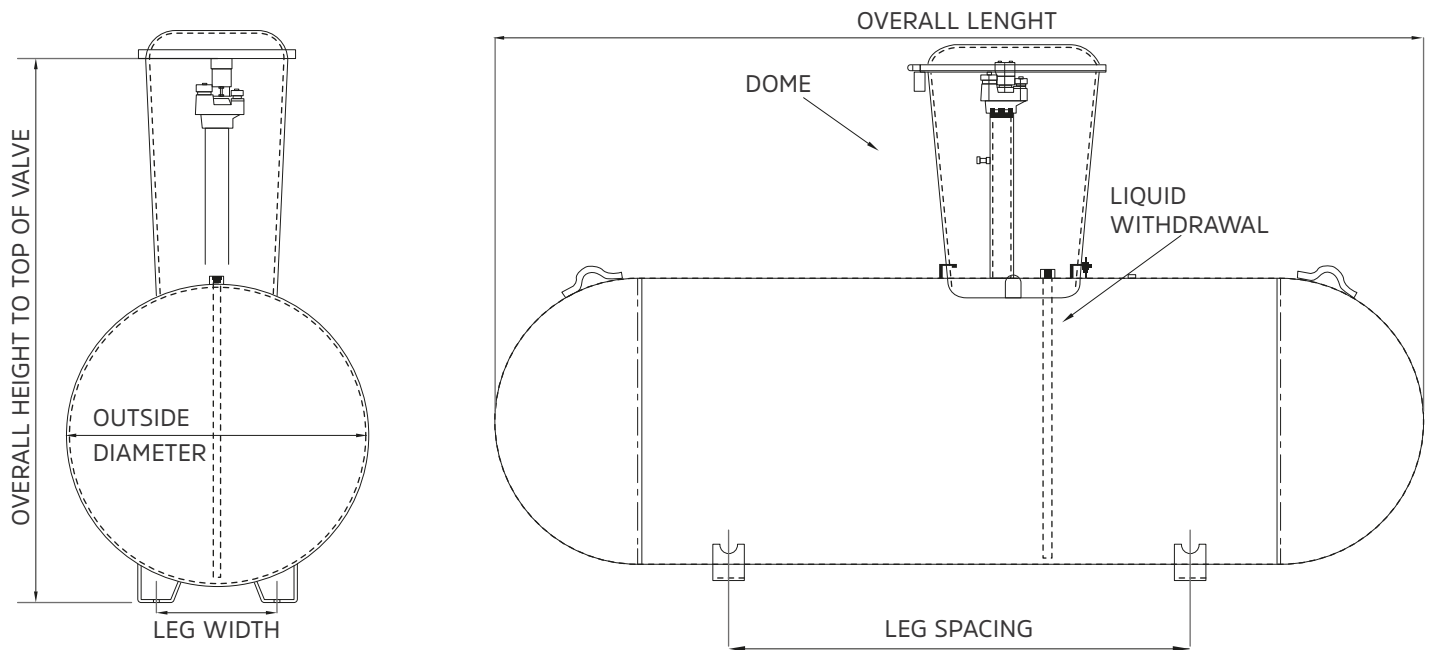

WATER CAPACITY	OUTSIDE DIAMETER	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG WIDTH	LEG SPACING	EMPTY WEIGHT	QUANTITY	
								FULL LOAD	PER STACK
500 WG	37 7/16 "	HEMI	9'- 9 11/16"	5'-7 7/16"	15"	5'-0"	904 LBS.	25	5
1000 WG	40 15/16 "	HEMI	16'- 1/16"	6'- 1/16"	16 1/4 "	9'- 1/8"	1720 LBS.	15	5

All vessel dimension are approximate